




The MGD-50 and MGD-100 jacks are fitted with two pumps (approach and operation).



Large base thickness. Great strength and stability.



Fast load approach screw.

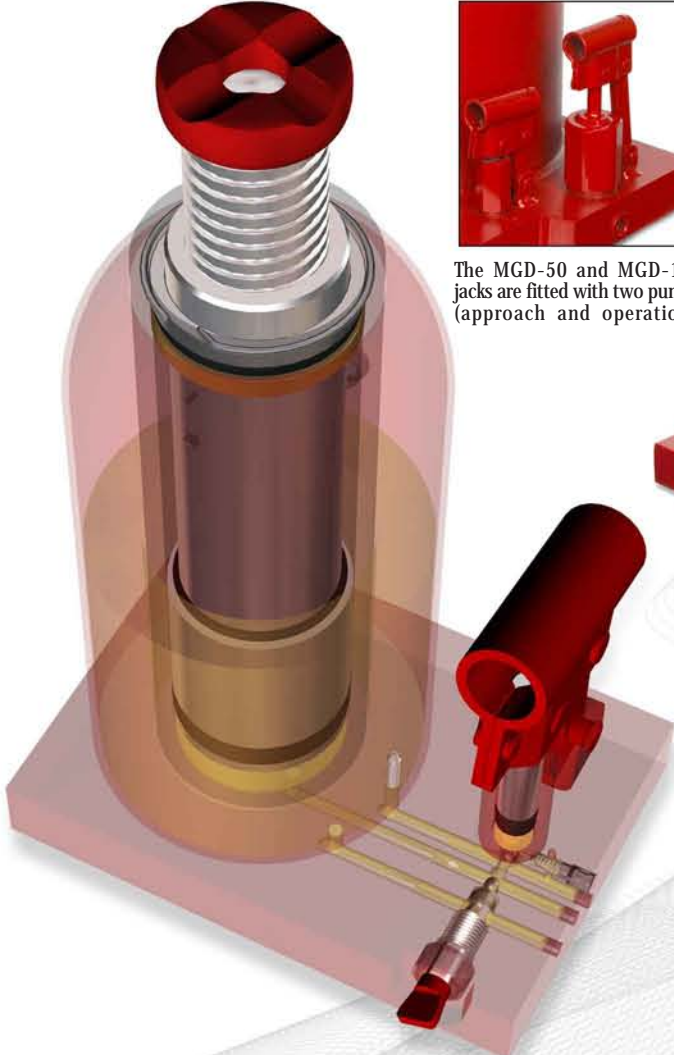

MG-20



MG-15





MG-50

The MEGA jacks can be used horizontally when required. Set the jack with the pump down.



Safety overload valve. Hydraulic stroke limitation.

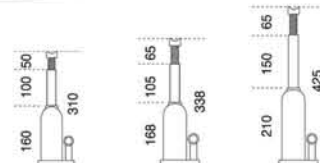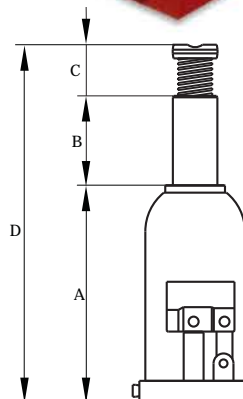

	2	3	3
Capacity (t)			
A	160	168	210
B	100	105	150
C	50	65	65
D	310	338	425
Weight (kg)	3,6	3,9	4,2
References	MG-2	MG-3	MG-3A

Hydraulic bottle jacks



The three-piece zinc coated handle is stored in the jack carton.



The base, pressure cylinder and oil deposit form one integral part and provide more strength and safety to the jacks.

Any pressure loads produced by the vehicle axle tilting are absorbed as the piston never comes into contact with the cylinder. Therefore the jack will not be damaged even if the vehicle tilts.

Quick and easy maintenance. With carrying handle from MG-20 onwards



MG-30

MGD-100

The MGD-100 model is fitted with pressure gauge and a two-piece handle.

Safety overload valve. Up to 5t. optional.

5	8	10	12	15	20	25	30	40	50	50	100
212	219	219	226	228	234	240	242	246	252	270	300
150	150	150	150	150	150	150	150	150	150	150	150
75	75	75	75	75	75	75	75	-	-	-	-
437	444	444	451	453	459	465	467	396	402	420	450
5	5,9	6,5	8	9	12,1	15	15,5	23,5	28,5	40	87
MG-5	MG-8	MG-10	MG-12	MG-15	MG-20	MG-25	MG-30	MG-40	MG-50	MGD-50	MGD-100